

🛞 INHERENTLY HEAT & FLAME RETARDANT

PERSONAL PROTECTIVE EQUIPMENT



INSULATED BIB PANT Article No.: 0805FT35

Flash Armor[®] inherently flame-retardant and high temperature resistant garments do not support cumbustion in the air, melt or drip due to their molecular structure and its flame retardant characteristics cannot be washed away. Our range is designed to cater for working conditions around the world as garments are offered in various designs and options.

Flame resistant clothing made with **Flash Armor**[®] provides valuable peace-of-mind, which enables those who wear it to focus on the job at-hand & perform to their fullest potential.



A breathable workwear with properties of inherent heat & flame retardant. This garment is a preferred choice of people working from the oil & gas, petrochemical, refinery industries, as well as an excellent choice for electric and power generation industries.

Inherently flame resistant – FR properties are built in and won't wash or wear out. Comfortable to wear - Soft & breathable. Roomy sizing patterns allow for a great fit. Exceptional durability – Outstanding laundered appearance - Fabric retains its like new look and maintains permanent pressed appearance. Excellent Value – Long life cycle & great durability.

COMPOSITION

Fabric Grade:Dupont™ Nomex® IIIAComposition:93% Nomex, 5% Kevlar, 2% P140 (Antistatic)Fabric Weight:4.5 oz or 150 gsmMiddle Layer:Wind Breaker Padding / FR felt

STYLE & DESIGN

- 6 Pockets Design -
 - One chest pocket / Two deep side pockets / Two rear pockets, one with flap on the right / One tool pocket on the right leg
- Two way heavy duty metallic zipper, snap button and storm flap closure
- Adjustable shoulder straps
- · Fully double stitched and bar tacked stress points
- Concealed elastic waist on backside
- Reinfroced knees
- Stitched with DuPont[™] Nomex[®] thread
- Colour Fastness 4-5 and Easy care
- All metal parts are fully concealed



INTERNATIONAL STANDARDS

- EN ISO 11612:2008 (A1 Limited Flame Spread, B1 Convective Heat, C1 Radiant Heat)
- EN 1149-5:2008
- NFPA-2112
- ASTM D 6413-99
- ASTM D 737

• ATPV 4,1 cal/cm² - HRC 1

 Rev.:
 Date:

 3.2
 March 30, 2016

EN ISO 11612 A1, B1, C1 EN ISO 1149-5 EN ISO 1149-5 CHIEFER

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT FR 6268-3.2




FLOWTRONIX (FT)

WWW.FLOWTRONIX.COM

WE ARE TRUSTED TO DELIVER QUALITY

NHERENTLY HEAT & FLAME RETARDANT

PERSONAL PROTECTIVE EQUIPMENT

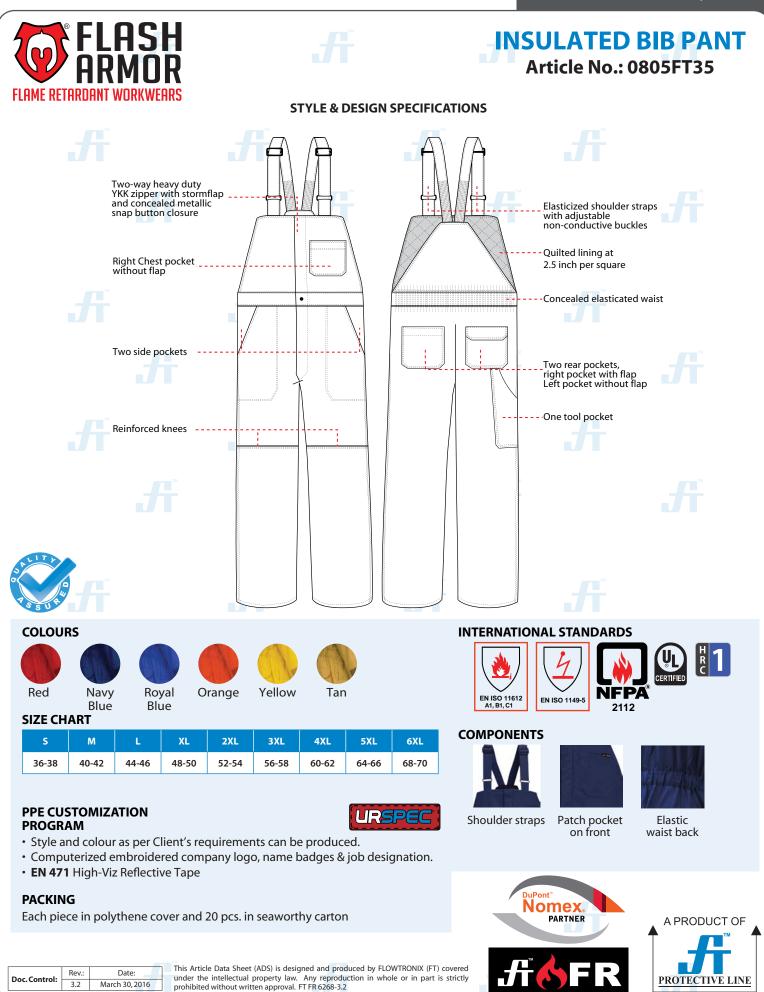

FLOWTRONIX (FT)

WWW.FLOWTRONIX.COM

WE ARE TRUSTED TO DELIVER QUALITY