


# AVIRTEX<sup>®</sup>

## High Temperature Technical Textile

Article No.: 7125FT200

High-silica fabrics are a new-generation heat resistant material. Glass fibre products with a high SiO<sub>2</sub> content are excellent high temperature insulators and can be used over long periods without losing the properties and without melting and vaporising.

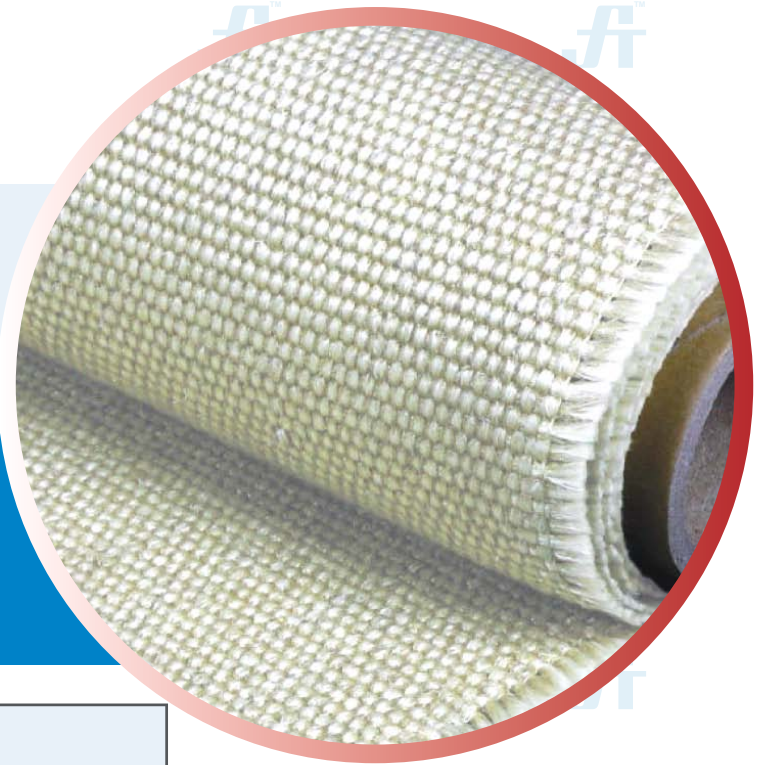

<b>Fiber Type:</b>	Silica
<b>Composition:</b>	96% SiO <sub>2</sub> , Al <sub>2</sub> O <sub>3</sub> 3.5 +/-0.5%
<b>Finish/Coating:</b>	Vinylpolymer - White Wet Frayproof Treatment
<b>Service Temp.:</b>	1050°C
<b>Melting Temp.:</b>	1600°C
<b>Color:</b>	White

### PPE CUSTOMIZATION PROGRAM



Customize size and stitching as per client's requirements

- Custom size blankets are stitched with fibre glass texturized thread, which bears high tensile strength, heat resistance and resistance against water, acids and organic solvents.
- Length of the blanket to be sewn together with an overlap of atleast 20-25mm (1").
- Atleast 25mm (1") overlap all around the blanket.
- Properly secured with heavy duty brass eyelets around the blanket with 500mm (24") gap.
- Velcro pastening can also be provided.

Distance of eyelets or velcro may vary as per client's requirements.

Properties	Metric	Test Methods
Weave	12H Satin	
Construction-	Warp	19.0 yarn/cm
	Weft	11.0 yarn/cm
Thread count		DIN 53853
Weight	1140 +70/-50 g/m <sup>2</sup>	DIN 12127
Thickness	1.25 mm	DIN EN ISO 5084
Width	100 +2/-1 cm	DIN EN 1773
Length	50m +/- 2	
Tensile Strength	Warp	4767.8 N/2.5cm
	Weft	2976.1 N/2.5cm
		EN ISO 13934.1

Roll Size	Blanket Sizes
1 x 50 (mtrs)	2 x 2 (mtrs) 2 x 4 (mtrs)

### Application

- As insulation & protection applications, such as sealing, packaging, protective screens
- As drop cloth for welding & fire curtains
- As reinforcement for acid resistant composites for filtration of molten metal & furnace exhaust, etc.

### Accessories



10 mm diameter brass eyelets

25 mm velcro

<b>Doc. Control:</b>	Rev.:	Date:
	3.2	April 11, 2016

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT HT 1211-3.2

